

Detolux - Takskjutportar



Aluminum Overhead Sectional Doors



Detolux overhead door, outfitted with the CD 77 slat



The entire Detolux overhead door system is TÜV certified with the GS seal



Doors with this symbol are manufactured according to the DIN-EN safety norms

Applicable Rolling Door Curtains



Aluminum door curtains

For aluminum roller doors, non-perforated curtains are used according to DIN requirements. Slats with high quality double coating finish, CFC-free foam insulation

Standard Version

CD 77 slat with 78.5 mm covered surface area

The high quality aluminum slats are supplied with "quiet-running roller locking devices". The door rolls gently during opening and closing over the special rollers. With SOFT motion and SOFT stop functions.

Components



Detolux overhead door operator. Central comfort operator with toothed drive belt and integrated radio control



Detolux garage doors outfitted with standard radio remote control




Detolux garage doors outfitted with standard hindrance detection.




Detolux garage doors outfitted with standard SOFT motion and SOFT stop functions

Ventilation slat CD 79 is included in the standard package.

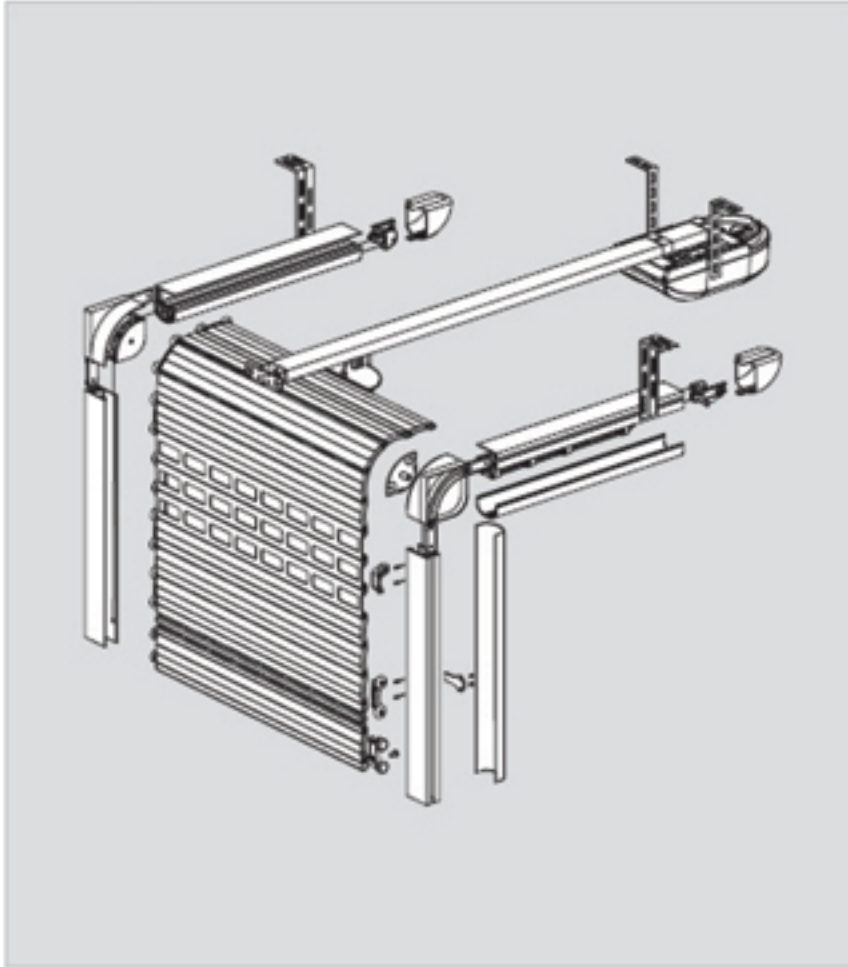

Applicable Guide Channels and Endslats

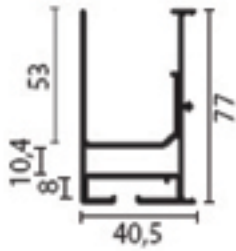


DT 53/W

Guide channel for horizontal installations



DT 53/WA

Guide channel covers for DT 53/W. Included in standard package

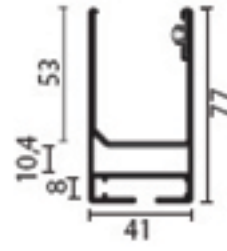


DT 53/S

Guide channel for vertical installations



DT 53/SA

Guide channel covers for DT 53/S. Not included in standard package. Available for an extra charge

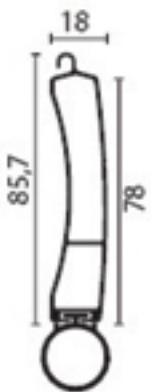

AEG/DW

Aluminum endslat, extruded, synthetic astragal



CD 79/R

Ventilation slat, extruded, meets legally prescribed forced air circulation regulations. Included in the standard package.